

BMW
GROUP



ROLLS-ROYCE
MOTOR CARS NA LLC

SIMULATION OF SHEET METAL FORMING.

CURRENT DEVELOPMENTS.

TP-111

TABLE OF CONTENTS.

- Introduction.
- Forming simulation at BMW – State of the art.
- Current Developments.
- Summary and Outlook.

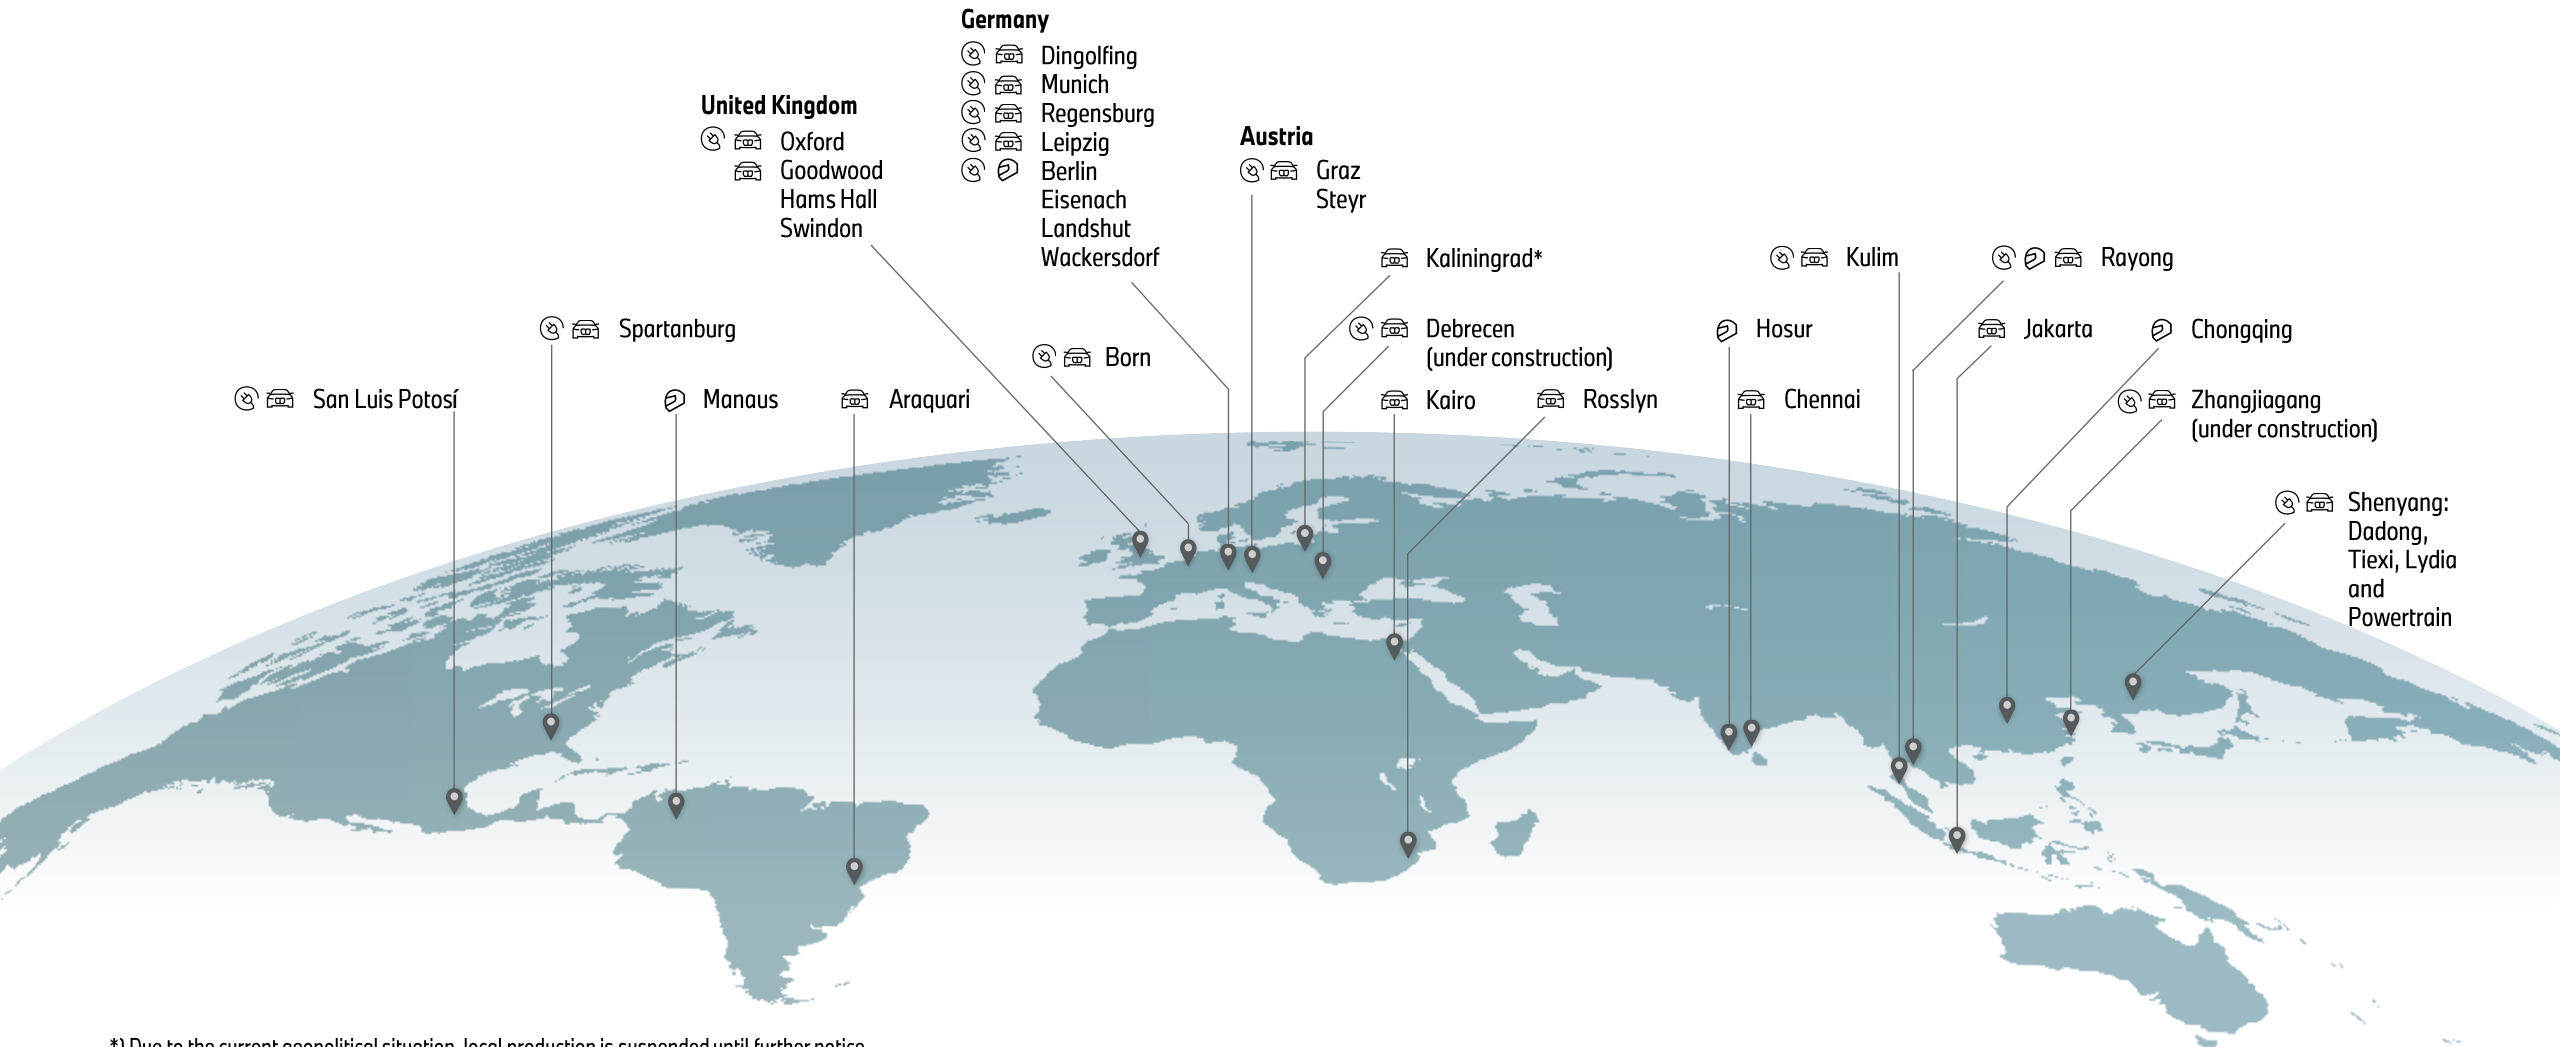


TABLE OF CONTENTS.

- Introduction.
- Forming simulation at BMW – State of the art.
- Current Developments.
- Summary and Outlook.



INTRODUCTION - INTERNATIONAL BMW GROUP PRODUCTION NETWORK. MORE THAN 30 PRODUCTION SITES ALL OVER THE WORLD.




*) Due to the current geopolitical situation, local production is suspended until further notice.

INTRODUCTION. FROM THE DESIGN TO THE ENGINEERING TO A DEEP DRAWING TOOL.

– Cardesign.




– Engineering.

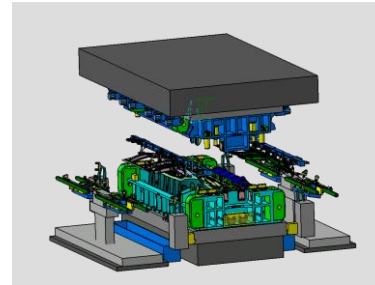

– Production.



- Exemplary setup of a forming tool of a hood-inner.

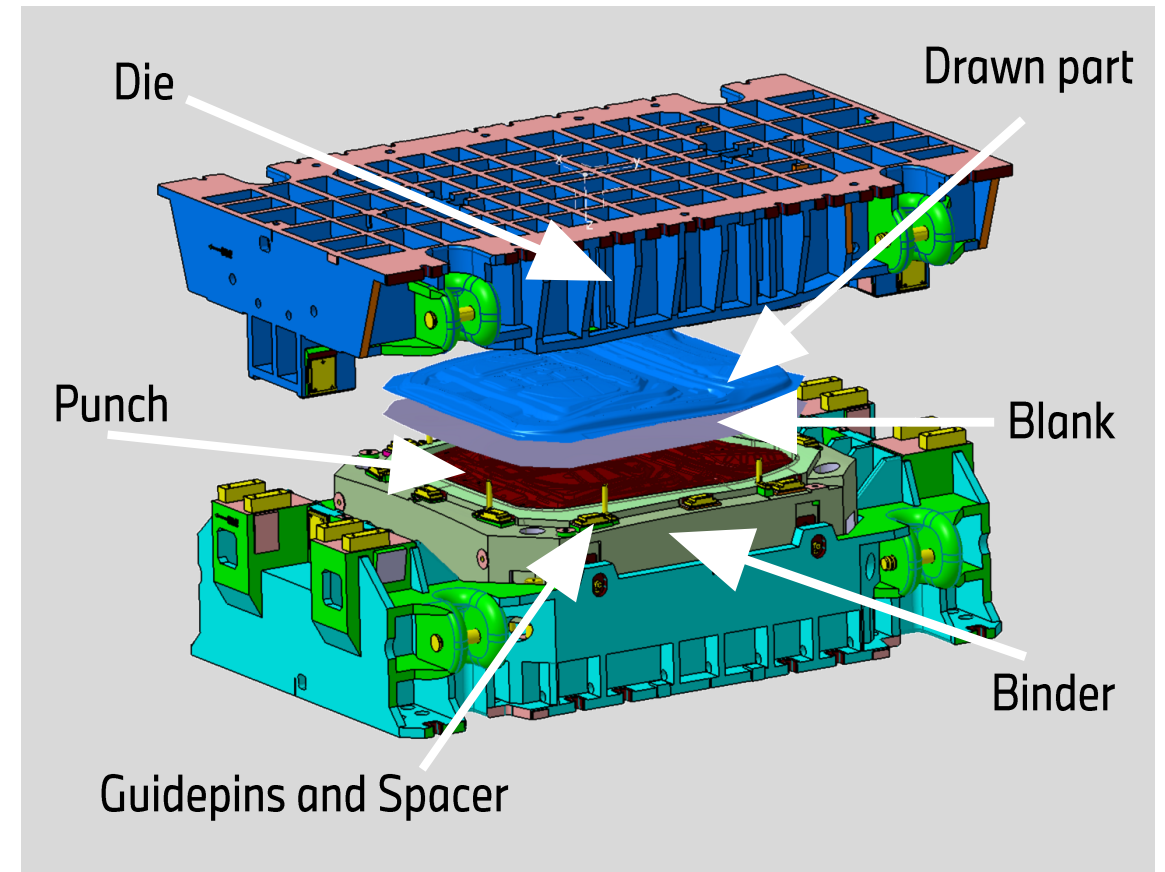



INTRODUCTION.

- Part production at the press shop.

– Raw material.



– Coil-Cut.

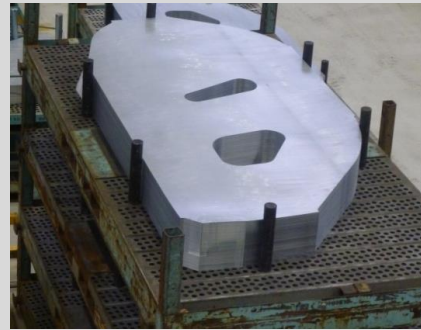

– Press shop.



– Deep drawing tool.



- Assembly of the single parts to a body in white.

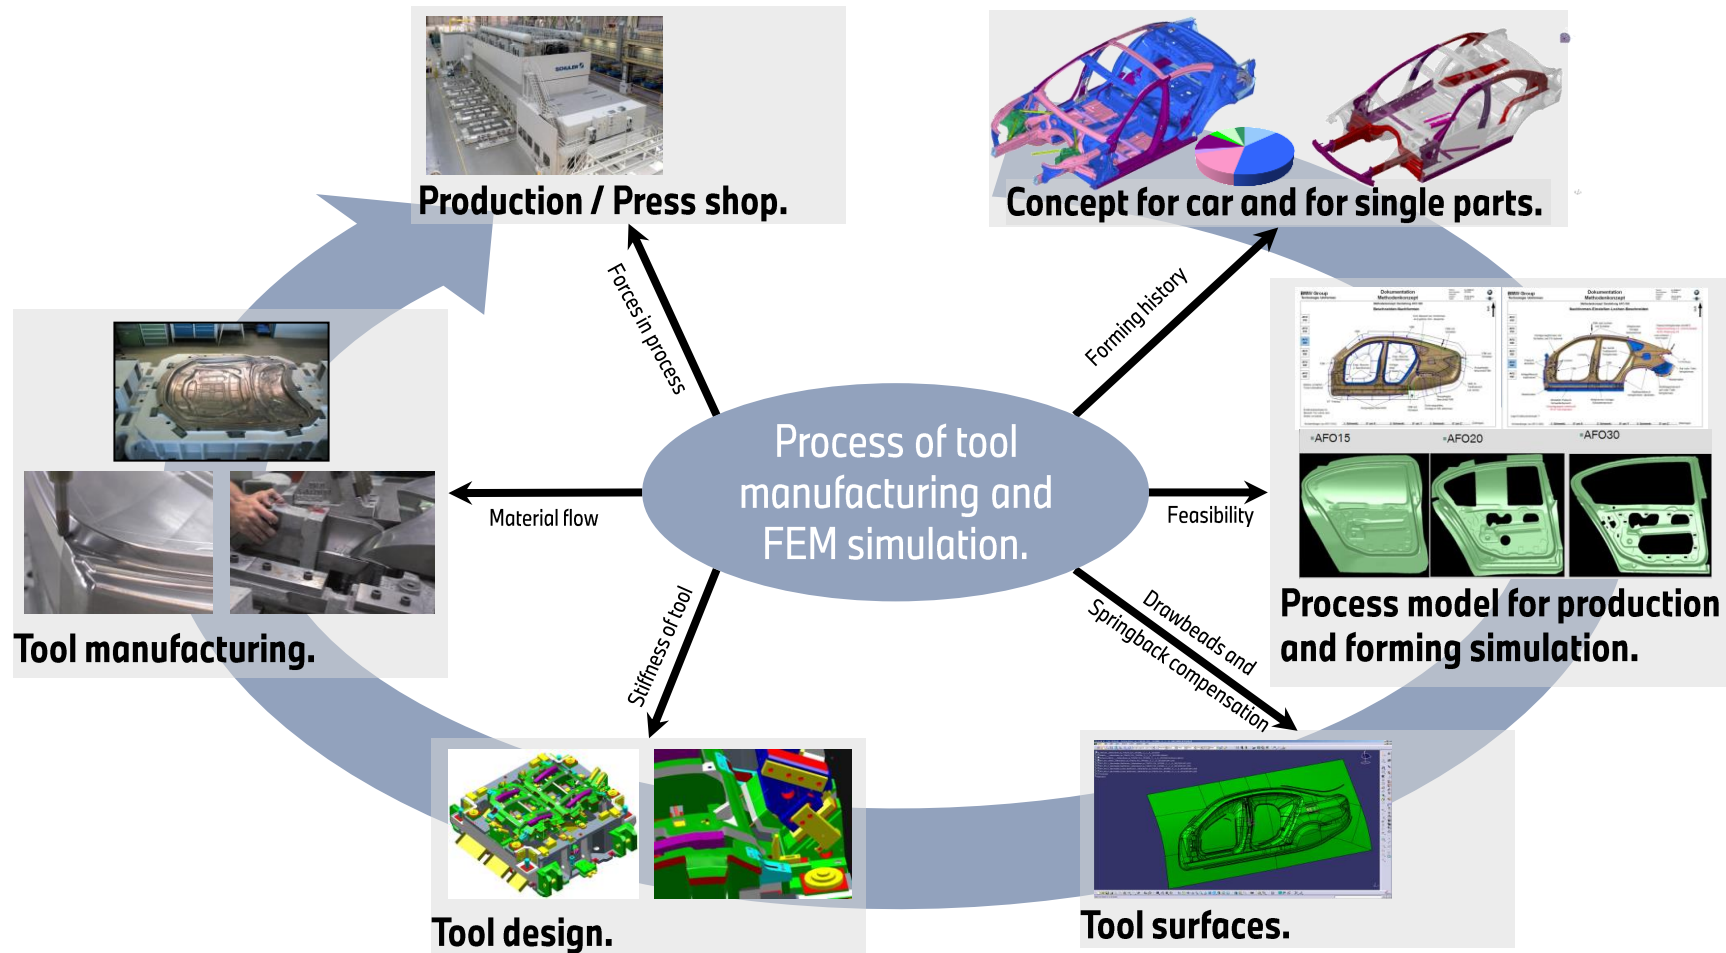


TABLE OF CONTENTS.

- Introduction.
- Forming simulation at BMW – State of the art.
- Current Developments.
- Summary and Outlook.




FORMING SIMULATION AT BMW – STATE OF THE ART. SIMULATION IN THE TOOL DEVELOPMENT PROCESS.



FORMING SIMULATION AT BMW – STATE OF THE ART.

- Modular setup of the processes.

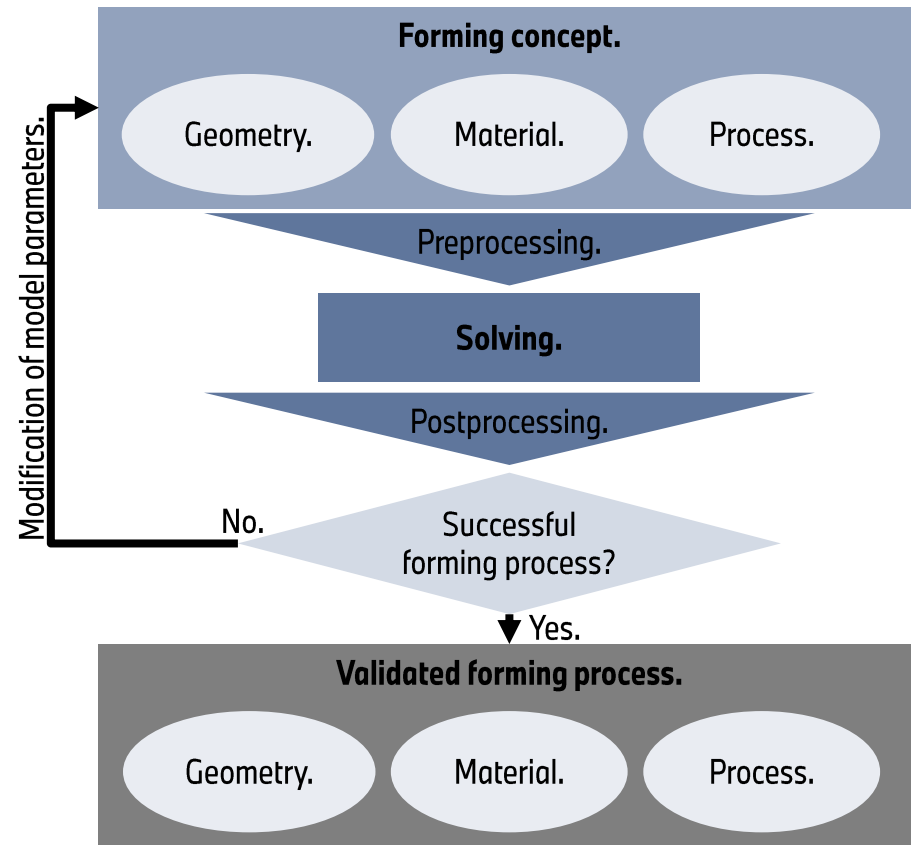

- Application of forming simulation.

Software

Trimming

Deformation of tools on a press

Forming Simulation

Draping of CFRP

Springback Compensation

Press hardening

Materials

Cold deep drawing

TABLE OF CONTENTS.


- Introduction.
- Forming simulation at BMW – State of the art.
- Current Developments.
- Summary and Outlook.



CURRENT DEVELOPMENTS. LIMITATIONS OF THE RIGID-TOOL-ASSUMPTION.


- State of the art sheet metal forming simulation in the series engineering has a lot of assumptions.
- One assumption is that the tools are absolutely rigid.
- Several strategies for enhancements of elastic tools have been investigated – Full approach vs. local approach.
- Application of an elastic blankholder has increased the accuracy of the prediction for the blank [20].

- Full approach vs. local approach on a first prototype.

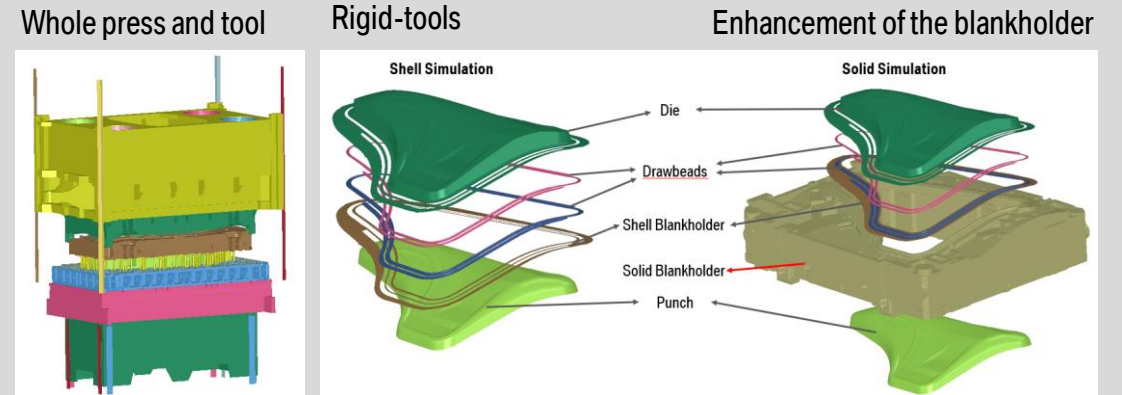


- Tool stiffens and influence on springback.

Tool deviation of blankholder under force load

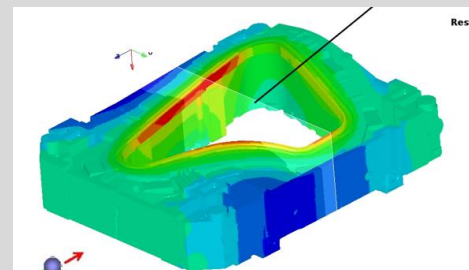

Influence on springback is depending of the BLH modelling

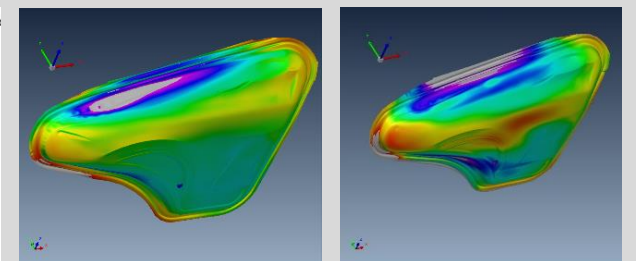


CURRENT DEVELOPMENTS. DOOR HANDLE AND SHARP RADII.


- FLD is state of the art for failure prediction in sheet metal forming and has limited capabilities.
- Application of fracture models like GISSMO or DIEM into the standard engineering process is ongoing.
- Shell-Elements have different limitations; even on sharp radii. Application of Solid-Elements is a possible next step to increase the accuracy of prediction.
- New shell implementations will be investigated to solve this problem as well (e.g. IGF-Forschungsvorhaben „3D-Blechmodellierung 2“) [18].

- Application to a door prototype – FLD prediction.

Shell – Blank FLD plot

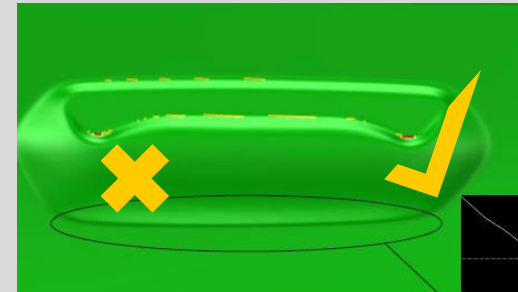


Solid – Blank Shaded view

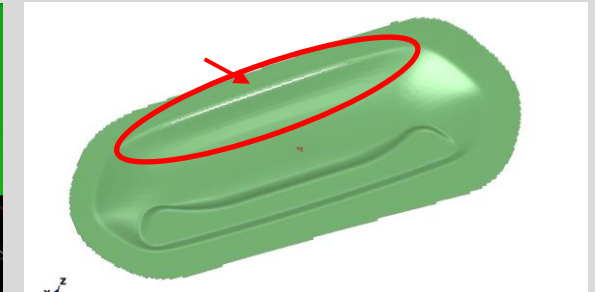

Demonstrator-Tool Results



Solid – Blank - Damage-Variable – 0.5 bis 1.0

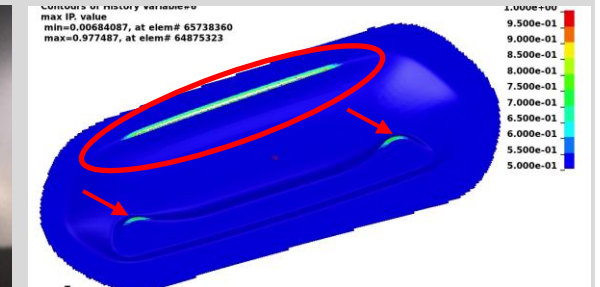

- Simulation with solid blank and fracture model is validated with results from a testing tool.


CURRENT DEVELOPMENTS.

COUPLING A PRESS HARDENING SIMULATION WITH FLUID COOLING.


- John Hallquist proposed the “One-Code”-Strategy [19].
- We adopted it to the “One-Input-Deck”-strategy to model all 4 physical disciplines in a object oriented and hierarchical inputdeck in earlier publications.
- A coupled simulation of structure and heat transfer is state of the art – e.g. press hardening with 1 strike.
- A virtual prototype was created for a fully coupled press hardening simulation with water cooling pipes.
- Cooling simulation is a good simulation process to optimize cold deep drawing tools as well. E.g. wheelhouses.

- Virtual b pillar prototype and cold drawing.


B pillar with u-tube in the punch – Time 0

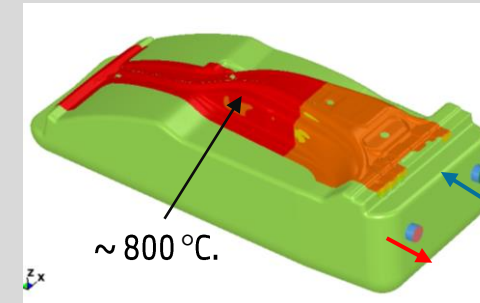


Time 1

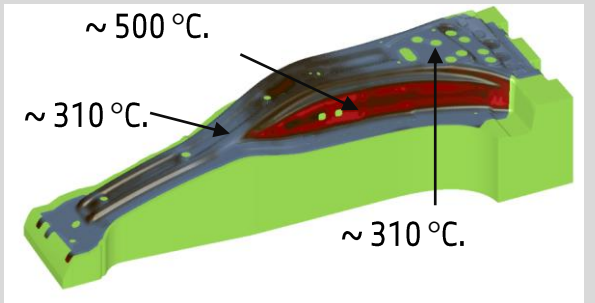


Fluid dynamics for water and temperature

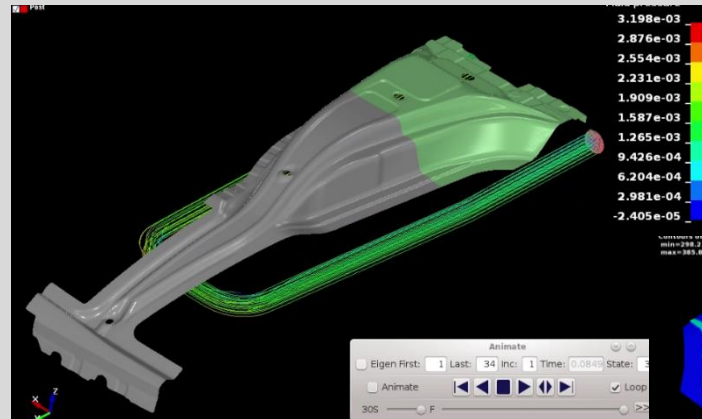

T-plot inside the tool




T-plot for a wheel house

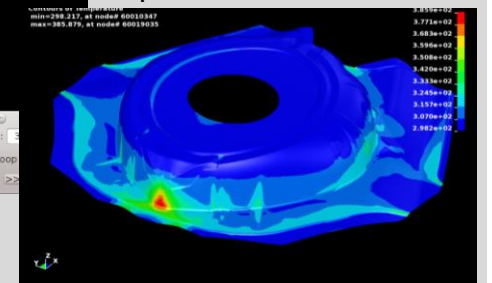

CURRENT DEVELOPMENTS. THERMO-MECHANICAL CYCLIC SIMULATION.

- A coupled simulation of structure and heat transfer is state of the art – deep drawing with 1 strike.
- A virtual prototype was created for a thermomechanical coupled deep drawing simulation - cyclic loading is applied and combined with “steady state” thermal steps [20].
- Method was transferred to a wheel house – Hot spots can be identified and the final temperature under cyclic loading in series production can be computed.
- Geometry of the tools can be optimized regarding the thermo-design or a cooling system can be applied to the necessary position.

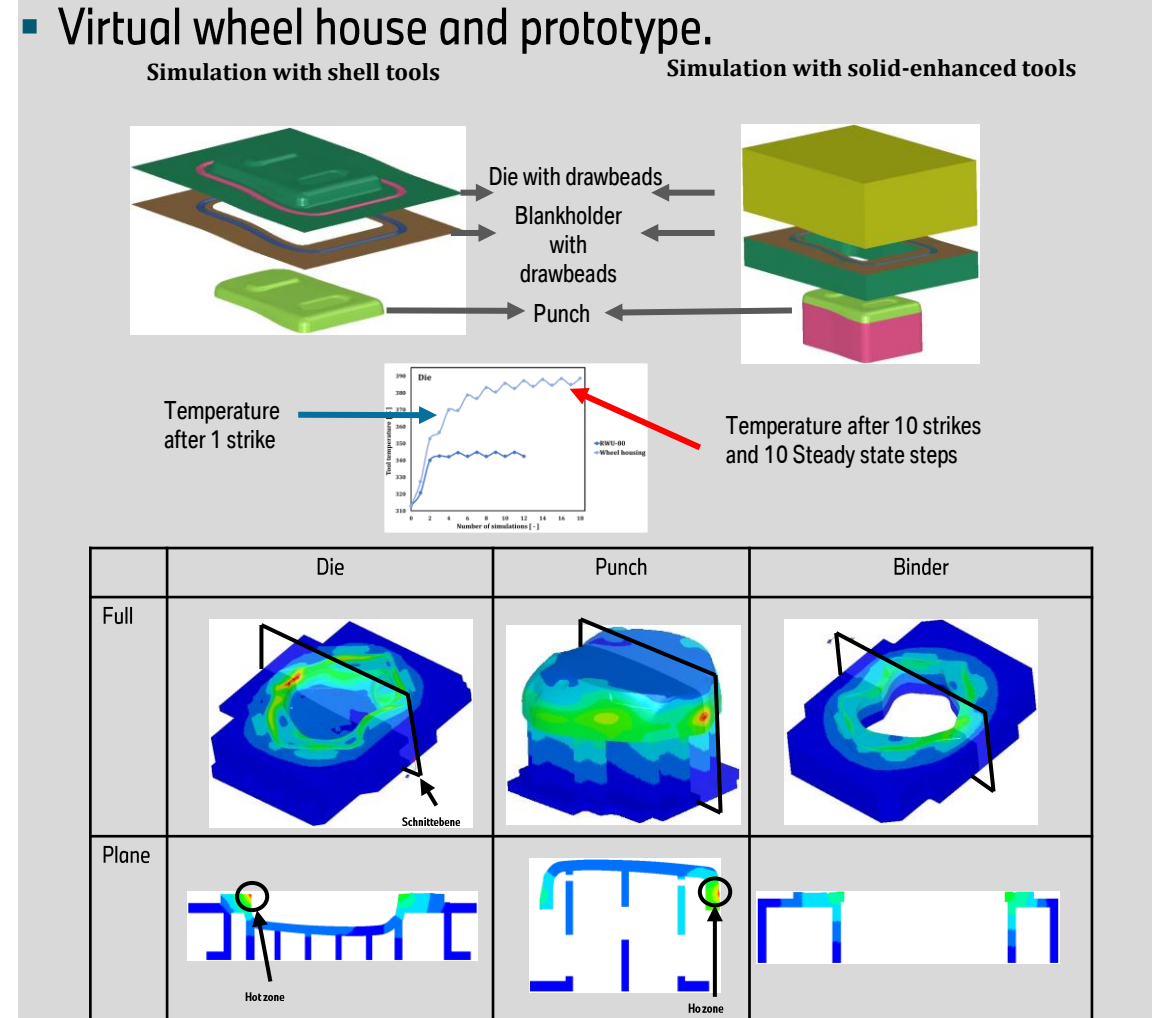


CURRENT DEVELOPMENTS.


LS-DYNA R12 – INCORE-ADAPTIVITY – FIRST RESULTS.

- Usage of R9.3 Solver is state of the art and is running very stable for the standard sheet metal forming simulations.
 - Enhanced by user friction models, material models from Matfem, fracture models, etc.
- A big issue is the time consuming h-adaptivity.
- In LS-DYNA R12, an approach for the incore-adaptivity / dynamic load balancing is implemented.
- The next step will be the usage of this feature in series engineering.
- **Benefit:** Time-Reduction of our models up to 50% depending of the model size.


■ The 2 GT.



■ The 8.

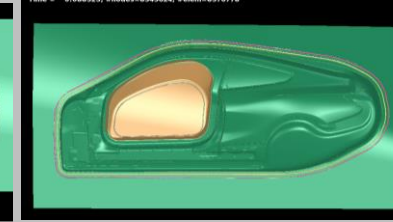

■ The X7.

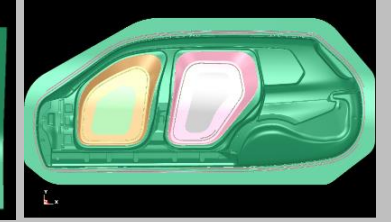

- Simulation times for big models – with geometrical drawbead and highest accuracy settings.

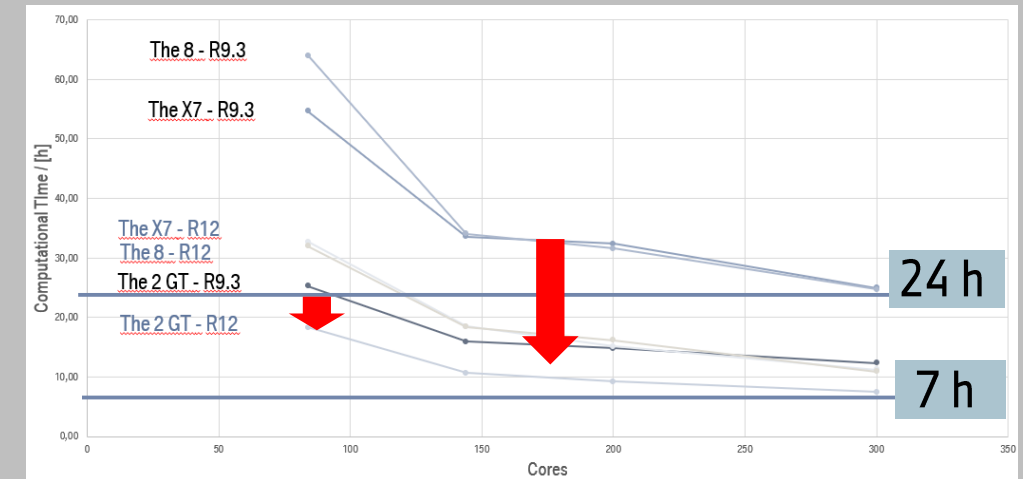


TABLE OF CONTENTS.

- Introduction.
- Forming simulation at BMW – State of the art.
- Current Developments.
- Summary and Outlook.



SUMMARY.

- Usage of a meta language in processes for sheet metal forming simulation with FE solver LS-DYNA is state of the art at BMW.
- The enhancement of the “state of the art” simulation processes is a continuous process.
- Simulation technologies like solid elements for the blank or fracture models are applied to the engineering.
- The “One-Inputdeck”-strategy was enhanced by a virtual prototype with fluid cooling for a b-pillar.
- First results with LS-DYNA R12 and Incore-Adaptivity will reduce the computational time.



OUTLOOK.

- Challenge for the future.
 - Use of AI Technology in the engineering process for sheet metal forming.
 - Where do we need some basic developments?
 - Open interfaces, open data structures, automatization, etc.



THANK YOU VERY MUCH FOR YOUR ATTENTION.



LITERATUR.

- [1] Livermore Software Technology Corporation, LS-DYNA KEYWORD USER'S MANUAL VOLUME I R12, 2020.
- [2] Meinhardt, J., Lipp, A., Ganser, M., Fleischer, M., Aspekte der Simulation Blechumformung im industriellen Umfeld, LS-DYNA Forum 2007, Deutschland.
- [3] Meinhardt, J., Lipp, A., Fleischer, M., Neue Prozesse im Bereich Simulation Blechumformung, LS-DYNA Forum 2009, Deutschland.
- [4] Fleischer, M., Panico, T., Meinhardt, J. Lipp, A., Anwendung der Simulation in der Technologie Umformen, LS-DYNA Forum 2011, Deutschland.
- [5] Fleischer, M., Lipp, A., Meinhardt, J., Hippchen, P., Heinle, I., Ickes, A., Senner, T., Usage of LS-DYNA in Metal forming, Europäische LS-DYNA Konferenz 2015, Deutschland
- [6] Fa. GNS, OpenForm, Europäisches LS-DYNA Forum 2013, England.; www.gns-mbh.com
- [7] Fleischer, M., Sarvas, J., Grass, H., Meinhardt, J., Umformsimulationen, Schnittstellen und Prozesse, LS-DYNA Forum 2016, Deutschland
- [8] Fleischer, M., Sarvas, J., Grass, H., Meinhardt, J., Forming simulation, meta language and input decks, LS-DYNA Conference 2017, Austria
- [9] <http://lstc.com/>, 2022
- [10] Livermore Software Technology Corporation, LS-DYNA KEYWORD USER'S MANUAL VOLUME 2 Material Models R12, 2020.
- [11] Livermore Software Technology Corporation, LS-DYNA KEYWORD USER'S MANUAL VOLUME 3 Multi-Physics Solvers R12, 2020
- [12] BELYTSCHKO, T., LIU, W.K., MORAN, B., Nonlinear Finite Elements for Continua and Structures. Wiley, 2008
- [13] Hippchen, P., Merklein, M., Lipp, A., Fleischer, M., Grass, H., Craighero, P., Modelling kinetics of phase transformation for the indirect hot stamping process, Key Engineering Materials, Vol. 549, pages 108-116, 2013
- [14] Senner, T., Kreissl, S., Merklein, M., Meinhardt, J., Lipp, A., A modular modeling approach for describing the in-plane forming behavior of unidirectional non-crimp-fabrics, Production Engineering, Volume 8, Issue 5, pp 635–643, October 2014
- [15] Senner, T., Kreissl, S., Merklein, M., Meinhardt, J., Lipp, A., Bending of unidirectional non-crimp-fabrics: experimental characterization, constitutive modeling and application in finite element simulation, Production Engineering, Volume 9, Issue 1, pp 1–10, February 2015
- [16] Wagner, M., Lineare und nichtlineare FEM, Springer Verlag, 2017
- [17] Birkert A., Haage, S. and Straub. M., Umformtechnische Herstellung komplexer Karosserieteile: Auslegung von Ziehanlagen. Springer, 2013.
- [18] Willmann, T., Bieber, S. Bischoff, M., Nonlinear Poisson Stiffening Effects in 3d-shell Models, WCCM-Konferenz, 2022
- [19] Hallquist, J., Recent Developments and Roadmap, 12th international LS-DYNA User's Conference, Detroit, 2012
- [20] Paramasivam, N., Modelling of the Thermo-mechanical Behaviour of the Deep Drawing Tools and Blank Sheet under Cyclic Loading in Production, Masterarbeit, RWTH Aachen, 2022.